


# BRIGANTO CROSS CUT AUTOMATIC EXTRUSION & CUT-OFF SAW

HIGH PERFORMANCE LEADS TO MORE PRODUCTIVITY

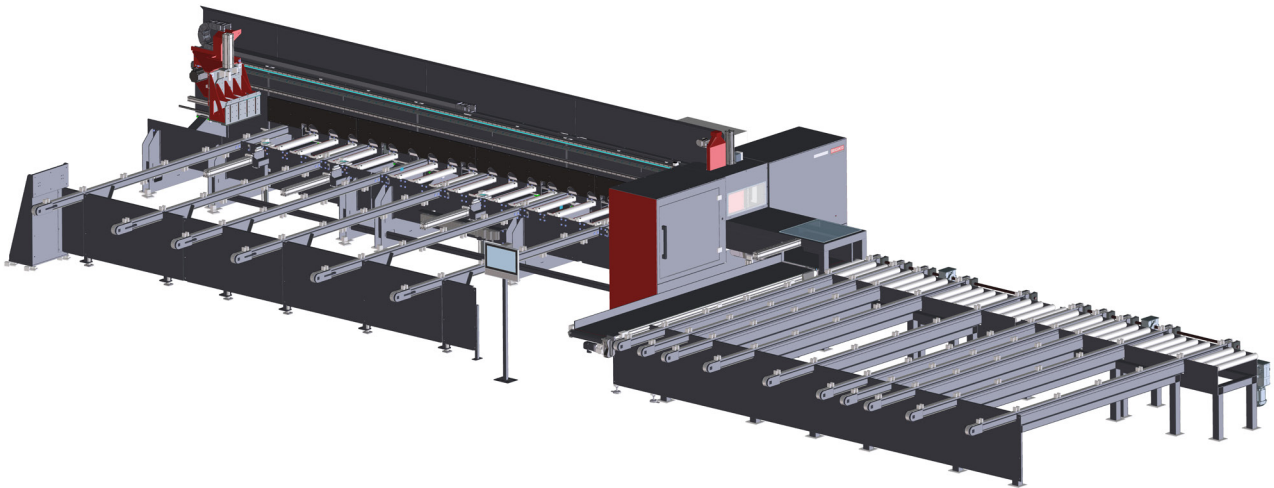

## APPLICATION RANGE

- . Automatic and high precision cut-to-length cutting of Aluminum and Non-Ferrous Metal extrusions
- . Flexible cut-to-size center for Metal Distribution Centers
- . High volume trim and cut-to length lines for Aluminum Extrusion Mills

## THE WORKING PRINCIPLE

- . Dynamic material loading onto the staging and positioning area
- . Aligning of material against the squaring rail
- . Material specific clamping device (without template)
- . Automatic dimensional material inspection
- . High precision positioning of material during cutting sequence
- . Vertical material fixation with a solid pressure beam (without template)
- . Cutting sequences executed with pre-programmed cutting parameters
- . Material protective discharge of cut pieces and intelligent material staging
- . Automatic segregation of cut pieces and scrap
- . Open interface platform towards higher level (oder higher ranking) systems (MDE/BDE, Product Management Systems)
- . Optional expansion stages for additional (oder subsequent) processes (deburring, cleaning, measuring, stacking, etc.)



# BRIGANTO CROSS CUT AUTOMATIC EXTRUSION & CUT-OFF SAW

## TECHNICAL DATA

Cutting width _____	650 mm / 25 ½ inch
Maximum material thickness _____	250 mm / 10 inch
Maximum loading weight _____	110 kg/m / 245 lbs/40 inch
Maximum material length _____	customer specific
Power of Saw motor _____	34 kW / 45 HP
Saw carriage speed _____	0.1 – 80 m/min / 4 – 3200 inch/min

## MACHINE ACCURACY

Tolerance cut-to width _____	+/- 0.1 mm / 0.004"
Tolerance cutting height _____	+/- 0.5 mm for 100 mm cutting height
Positioning accuracy of positioning carriage _____	+/- 0.05 mm / 0.002"

## OUR BENEFITS

- . Highest flexibility – from a thin-walled extrusion up to solid round bars, all processed on one machine
- . No set-up time for different extrusion shapes
- . Highest dimensional and squareness accuracy
- . Best possible surface cutting quality due to selectable saw blade projection
- . Optimum material surface protection
- . Technical solution for cutting of pipes
- . Rest piece at the back (clamped) < 50 mm / 2 inches
- . Intuitive and operator friendly machine controls and with touchscreen
- . Cutting parameter library considering material and saw blade data

